
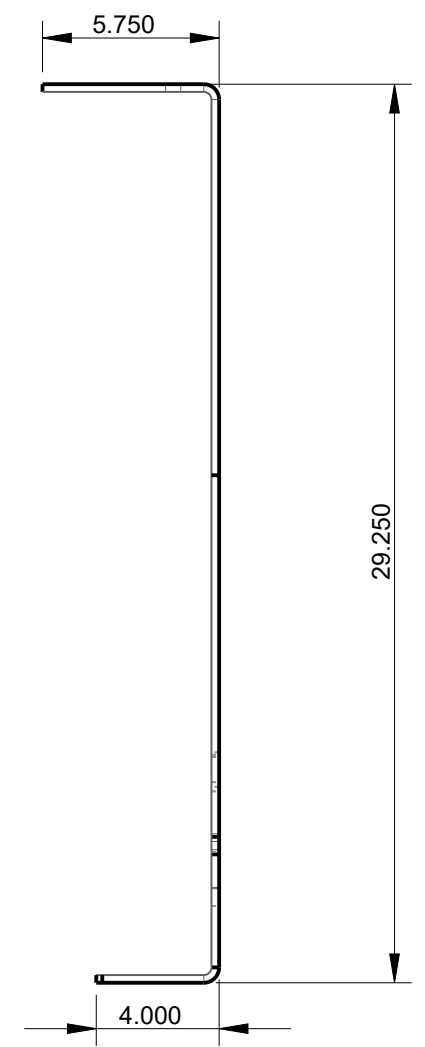


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
IR	Initial Release	4/6/15	KJS
I	SHORTENED SIDE .5 INCH	8/30/18	KJS
K	ADDED CORNER CUTOUT	5/30/19	KJS
L	NARROWED TO 29.25 OUTER	7/14/19	KJS
M	REVISED CUTOUT	12/7/20	KJS

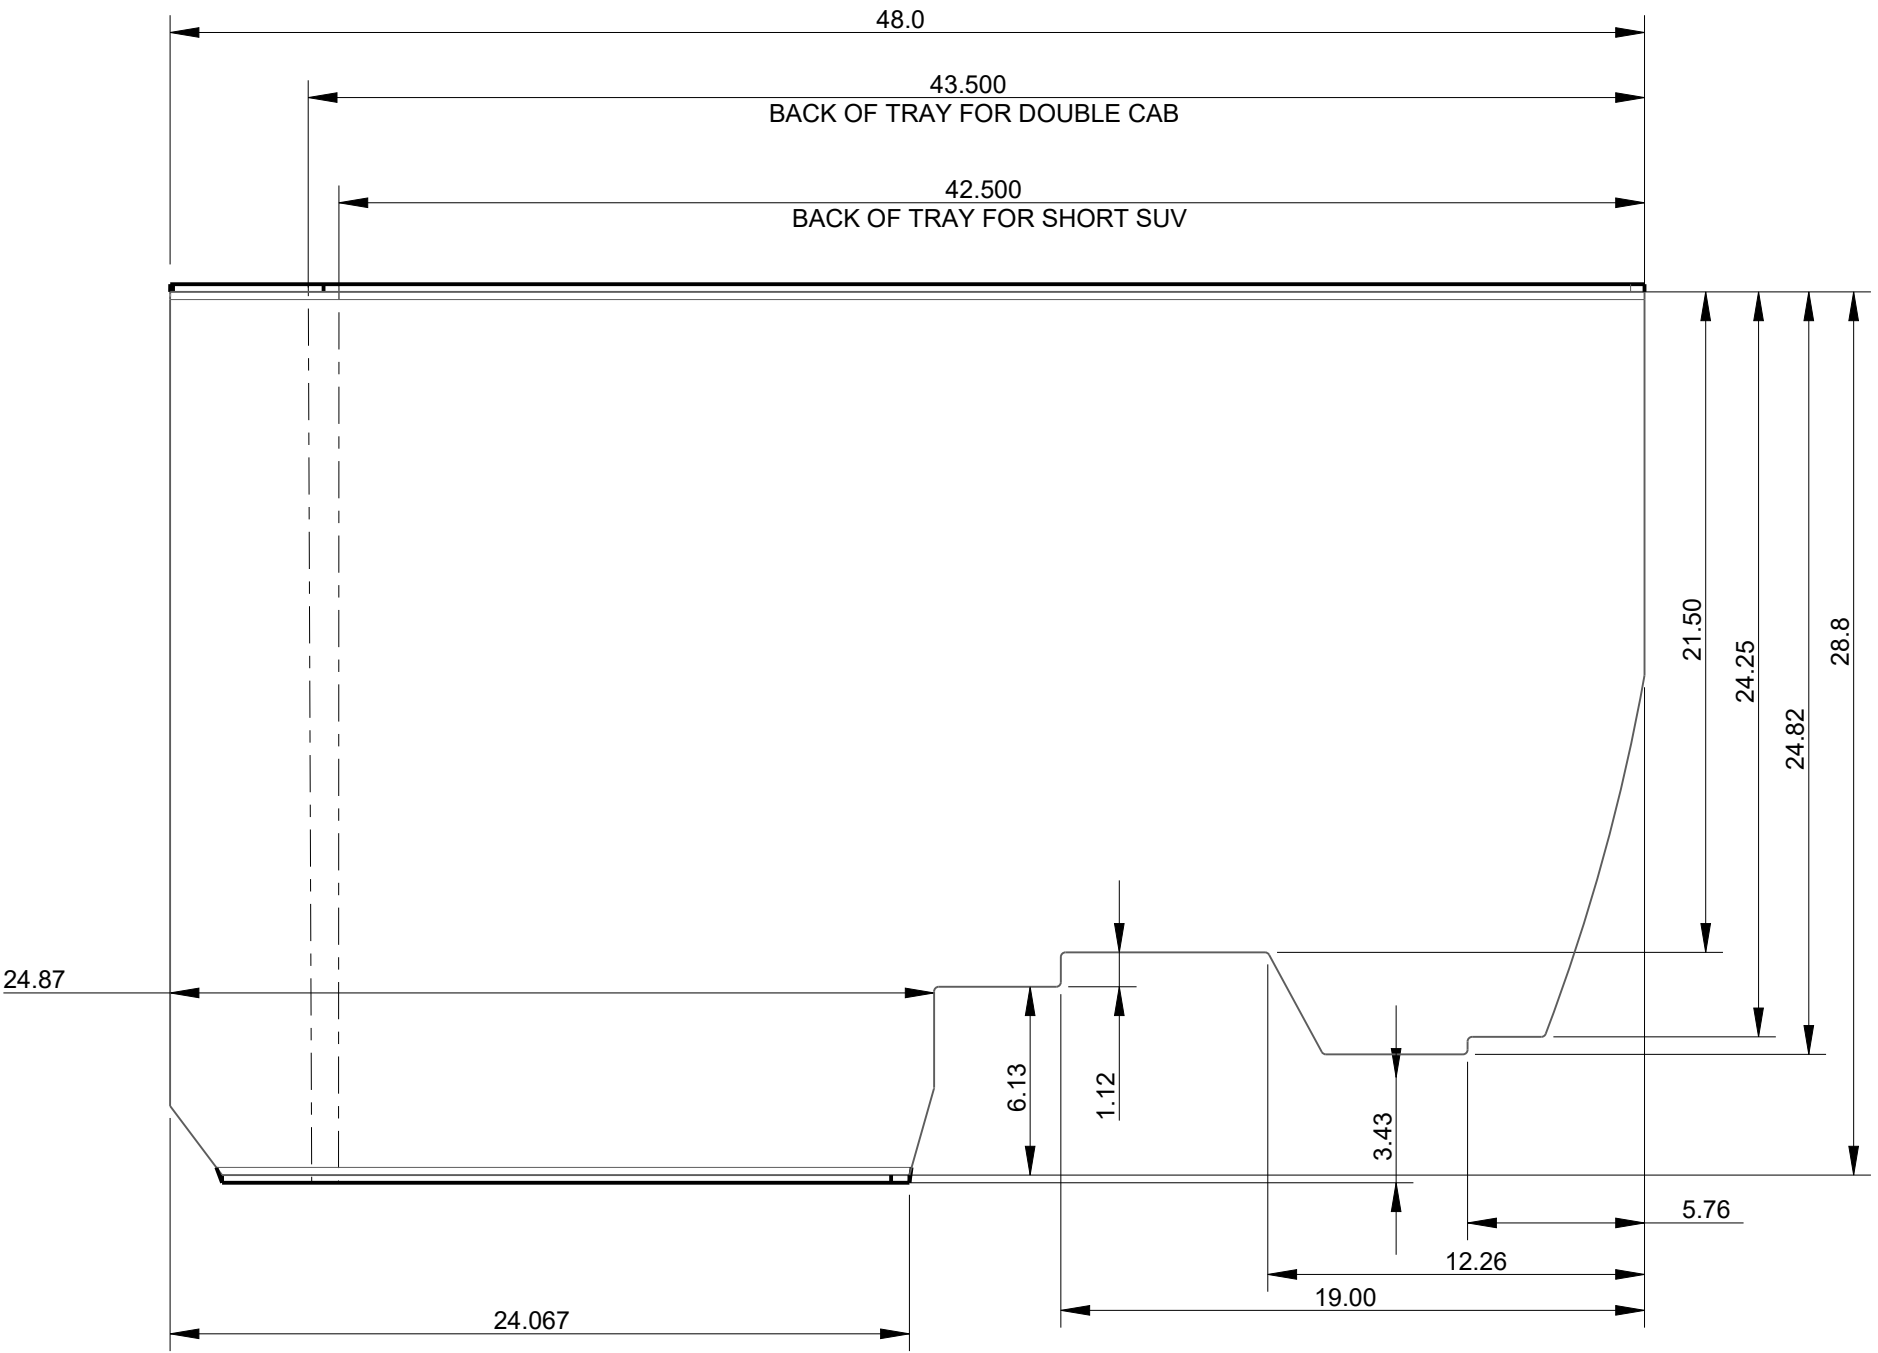

THE INFORMATION DISCLOSED HEREIN CONTAINS PROPRIETARY RIGHTS OF ALL TERRAIN CONVERSIONS LLC. NEITHER THIS DRAWING NOR ANY INFORMATION DISCLOSED THEREIN SHALL BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED BY ALL TERRAIN CONVERSIONS IN WRITING.

LASER/BEND TOLERANCES:
 1> HOLE DIAMETER: ± .005
 2> LASERED EDGES: ± .015
 3> FORMED BEND LOCATION: ±.030
 4> BEND ANGLE: ± 1 DEGREE

DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		
BASIC DIMS	2 PLACES	3 PLACES
UNDER 6"	+/- .02	+/- .005
6" TO 24"	+/- .03	+/- .010
24" AND UP	+/- .06	+/- .020
ANGLES +/- 1/2°		

1/4 HRS

ALL TERRAIN CONVERSIONS

SIZE: LIFT PAN DRV 1/2 TON 4WD

FRM00132