


| REVISIONS |                       |          |          |
|-----------|-----------------------|----------|----------|
| REV       | DESCRIPTION           | DATE     | APPROVED |
| IR        | Initial Release       | 1/11/16  | KJS      |
| A         | ADDED ALLISON CUTOUT  | 11/30/16 | KJS      |
| B         | REMOVED CORNER CUTOUT | 8/27/18  | KJS      |
| C         | LOWERED SIDE .5"      | 8/30/18  | KJS      |
| D         | NARROWED .109         | 10/22/18 | KJS      |
| E         | ADDED CORNER CUTOUT   | 5/30/19  | KJS      |

OUTER PAN IS WITH 2 INCH RISERS  
 INNER OUTLINE IS STANDARD HEIGHT  
 WITH ALLISON TRANSMISSION

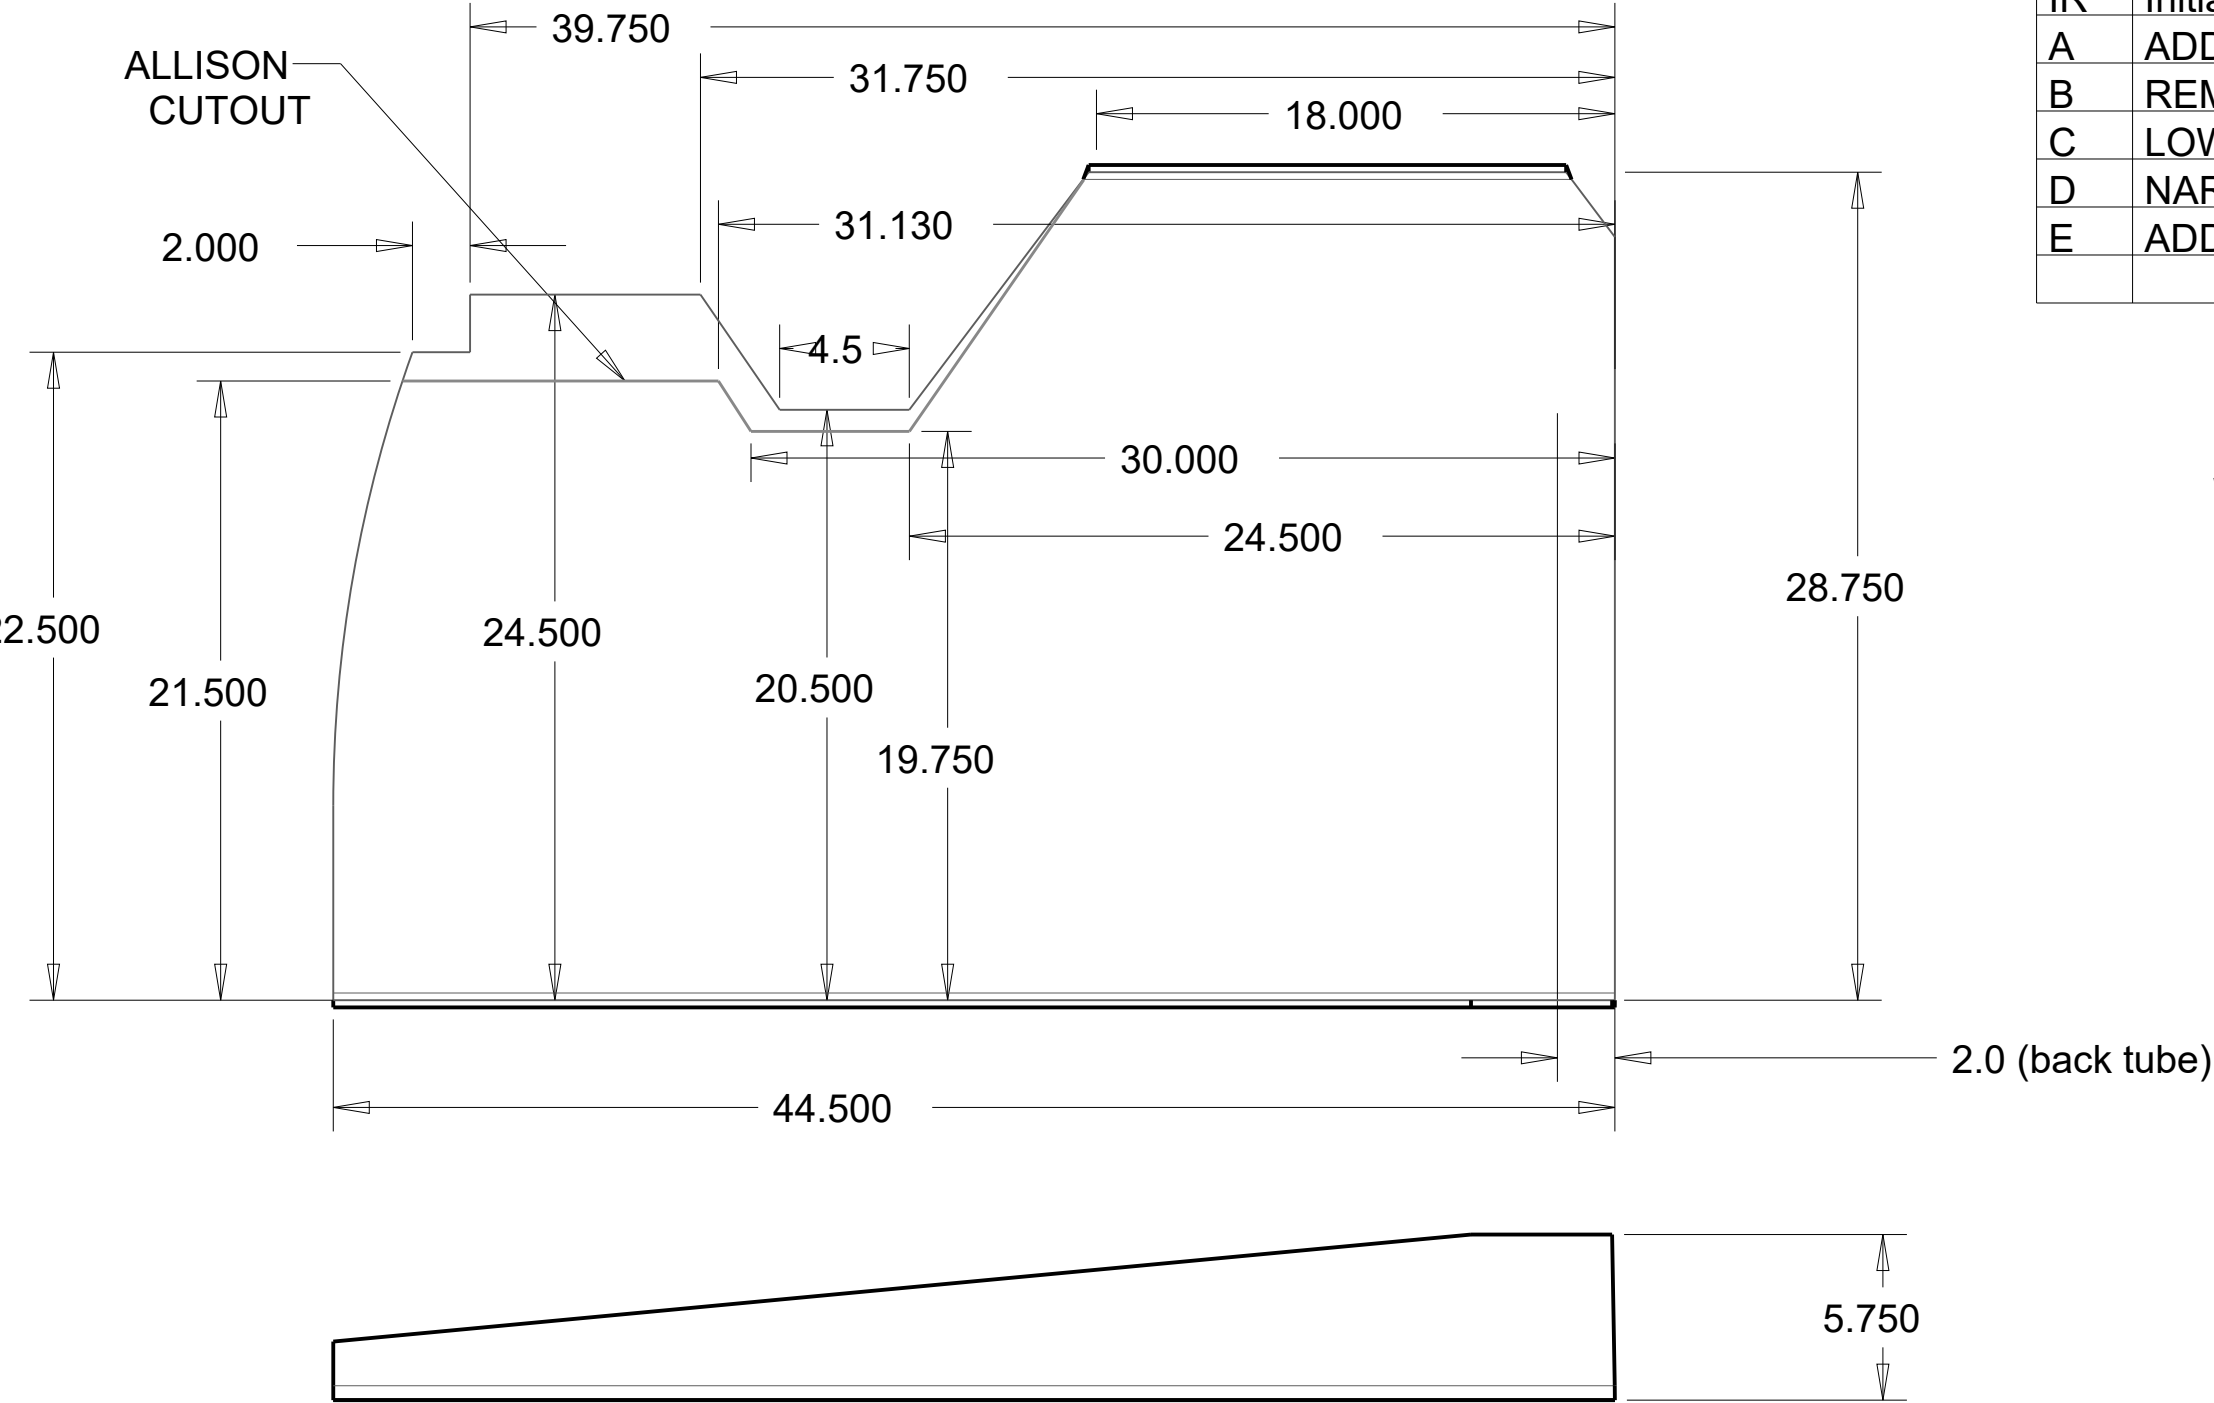

LASER/BEND TOLERANCES:  
 1> HOLE DIAMETER: ± .005  
 2> LASERED EDGES: ± .015  
 3> FORMED BEND LOCATION: ±.030  
 4> BEND ANGLE: ± 1 DEGREE

THE INFORMATION DISCLOSED HEREIN CONTAINS PROPRIETARY RIGHTS OF ALL TERRAIN CONVERSIONS LLC. NEITHER THIS DRAWING NOR ANY INFORMATION DISCLOSED THEREIN SHALL BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED BY ALL TERRAIN CONVERSIONS IN WRITING.

| DIMENSIONAL TOLERANCES<br>UNLESS OTHERWISE NOTED |          |          | 1/4 HRS | ALL TERRAIN CONVERSIONS |  |
|--|----------|----------|---------|-------------------------|--|
| BASIC DIMS                                       | 2 PLACES | 3 PLACES |         | SIZE                    |  |
| UNDER 6"   | +/- .02  | +/- .005 |         | 3/4 TON 4x4 DRV PAN     |  |
| 6" TO 24"  | +/- .03  | +/- .010 |         |                         |  |
| 24" AND UP                                       | +/- .06  | +/- .020 |         |                         |  |
| ANGLES +/- 1/2°                                  |          |          |         | FRM00473                |  |